

Human/Machine Interface

Magelis™ Panels and Industrial PCs

Global selection guide
October 2016



Quick access to Product information

Select your Catalogue, your Training

Digi-Cat

The complete digital catalogue for industrial automation




Makes your choice easy every day, everywhere!



With just 3 clicks, you can reach the 7,000 pages of the Industrial Automation & Control catalogue, in both English and French.

- Digi-Cat is available on a USB key (for PC). To get your Digi-Cat, please contact your local center
- Download Digi-Cat from this address:

<http://digi-cat.schneider-electric.com/download.html>


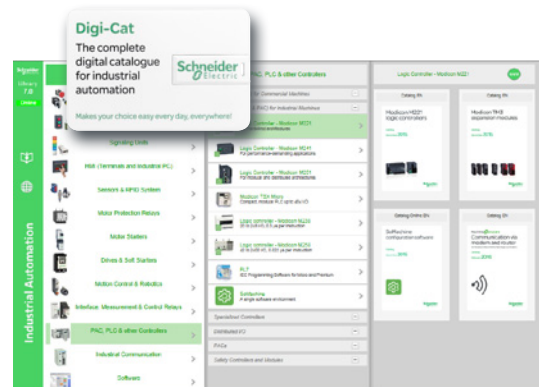


Find your training

- Find the right training for your needs
- Locate the training center with the selector tool, using this address:

<http://www.schneider-electric.com/b2b/en/services/training/technical-training.jsp>

then click on

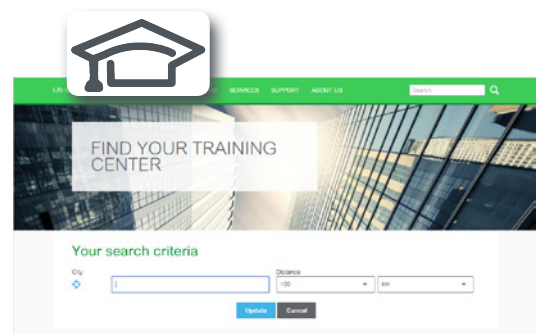

Life Is On






Human Machine Interface

Small and Advanced panels

Magelis STO & STU, Magelis XBTGH

Applications		Display of graphic pages	
Type of terminal		Small panels with touch screen	
			
Screen	Definition	320 x 240 pixels, QVGA	320 x 240 pixels, QVGA
	Type	3.5" color TFT LCD	5.7" color TFT LCD
Data entry		Via touch screen	
Memory capacity	Application	32 MB Flash EPROM	
	Expansion	-	
Functions	Maximum number of pages	Limited by internal Flash EPROM memory capacity	
	Variables per page	Unlimited	
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, curves, buttons, LEDs	
	Recipes	32 groups of 64 recipes	
	Curves	Yes, with log	
	Alarm logs	Yes	
	Real-time clock	Access to the PLC real-time clock	
	Multimedia I/O	-	
	Buzzer	Yes	
	Communication	Asynchronous serial link	RS-232C/RS-485
Downloadable protocols		Uni-TE, Modbus and for PLC brands: Allen-Bradley, Omron, Mitsubishi, Siemens	
Printer link		USB for serial or parallel printer	
USB ports		1 host type A and 1 device type mini-B	
Networks		1 Ethernet TCP/IP port (10BASE-T/100BASE-TX)	
Development software		Vijeo Designer (on Windows XP Professional and Windows 7 Business 32-bit and 64-bit)	
Operating system		Magelis	
References		HMISTU655 HMISTU655W	HMISTU855 HMISTU855W
Page		Please refer to Magelis STU and STO Small panels catalog on our website www.schneider-electric.com .	

Display of graphic pages		Display of text messages, graphic objects and synoptic views Control and configuration of data	
Small panels with touch screen		Advanced hand-held panels	
			
200 x 80 pixels, backlit - Green, orange and red, or - White, pink and red	480 x 272 pixels	640 x 480 pixels	
3.4" monochrome STN LCD	4.3" color TFT LCD	5.7" color TFT LCD	
Via touch screen			
16 MB Flash EPROM	26 MB Flash EPROM	32 MB Flash EPROM	
-	-	By means of 128 MB, 256 MB, 512 MB, 1 GB or 2 GB CF card (1)	
Limited by internal Flash EPROM memory capacity		Limited by capacity of internal Flash EPROM memory or CF card memory	
Unlimited		Unlimited (8000 variables max.)	
Alphanumeric, bitmap, bargraph, gauge, curves, buttons, LEDs		Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED	
32 groups of 64 recipes		32 groups of 64 recipes comprising 1024 ingredients max.	
Yes, with log		Yes, with log	
Yes		Yes	
Access to the PLC real-time clock	Option: RTC battery set	Built-in	
-	-	1 audio output	
Yes	-	-	
RS-232C/RS-485 (2) RS-232C using Zelio protocol (3)	RS-232C/RS-422/RS-485 (COM1)		
Uni-TE, Modbus and for PLC brands: Allen-Bradley, Omron, Mitsubishi, Siemens	Uni-TE (4), Modbus, Modbus TCP/IP and for PLC brands: Mitsubishi, Omron, Rockwell Automation and Siemens		
USB for serial or parallel printer	-		
1 host type A and 1 device type mini-B	1		
1 Ethernet TCP/IP port (10BASE-T/100BASE-TX) (5)	1 Ethernet port (10BASE-T/100BASE-TX)		
Vijeo Designer (on Windows XP Professional and Windows 7 Business 32-bit and 64-bit)	Vijeo XD (on Windows 7 and Windows 8)	Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)	
Magelis		Magelis (266 MHz RISC CPU)	
HMISTO5●●		HMISTO7●5	XBTGH2460/ XBTGH2460B (6)
Please refer to Magelis STU and STO Small panels catalog on our website www.schneider-electric.com .		Please refer to Magelis GH Advanced hand-held panels catalog on our website www.schneider-electric.com .	

(1) Except for HMIGTW●●●● with 4 GB SD memory card.
 (2) Only HMISTO511/512.
 (3) Only HMISTO501.
 (4) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.
 (5) Only HMISTO531/532.
 (6) Version without Emergency stop button.

Human Machine Interface

Advanced optimum panels

Magelis GTO


Applications	Display of text messages, graphic objects, and synoptic views Control and configuration of data
Type of terminal	Advanced optimum panels with touch screen



Screen	Definition	320 x 240 pixels, QVGA backlit		800 x 480 pixels, WVGA backlit		
	Type	3.5" color TFT LCD	5.7" color TFT LCD	W7.0" color TFT LCD		
Data entry	Via touch screen	Via touch screen	Via touch screen			
	Static function keys	6 function keys (static or dynamic)	–	8 function keys (static or dynamic)		
	Dynamic function keys	–	–	–		
	Service keys	–	–	–		
Memory capacity	Applications	64/96 MB Flash EPROM (1)		96 MB Flash EPROM		
	Expansion	–	By 4 GB SD card (except HMIGTO2300)			
Functions	Maximum number of pages	Limited by internal Flash EPROM memory capacity	Limited by capacity of internal Flash EPROM memory or of SD card			
	Variables per page	Unlimited (8000 variables max.)				
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED				
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.				
	Curves	Yes, with log				
	Alarm logs	Yes				
	Real-time clock	Built-in				
	Discrete I/O	–				
	Multimedia I/O	–				
	Degree of protection (according to IEC 60529)	IP 65 (IP 67 with addition of a cover)				
	Communication	Asynchronous serial link	RS-232C (COM1) and RS-485 (COM2) except HMIGTO1310: RS 232C/485 (COM1)			
Downloadable protocols		Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens				
Asynchronous serial link		RS-232C (COM1) and RS-485 (COM2) except HMIGTO1310: RS 232C/485 (COM1)				
USB ports		1 type A host connector + 1 type mini-B connector				
Development software	Buses and networks	Ethernet TCP/IP (10BASE-T/100BASE-TX) (3), Modbus Plus and Fipway via USB gateway				
	Printer link	RS-232C (COM1) serial link (4) and USB port for parallel printer				
Operating system	Vijeo Designer (on Windows XP and Windows 7)					
Type of terminal	Magelis (333 MHz RISC CPU)					
Page	Type of terminal	HMIGTO1300 HMIGTO1310	HMIGTO2300 HMIGTO2310	HMIGTO3510		
	Page	Please refer to Magelis GTO Advanced panels catalog on our website www.schneider-electric.com .				

(1) Depending on model.
 (2) Uni-TE version V2 for Twido controller and TSX Micro/Premium platform.
 (3) Except HMIGTO1300 and GTO2300 (Modbus Plus and Fipway via USB gateway only).
 (4) Except HMIGTO1310 (USB port for parallel printer only).

Display of text messages, graphic objects, and synoptic views Control and configuration of data					
Advanced optimum panels with touch screen			Advanced optimum panels with touch screen, "Stainless Steel" version		

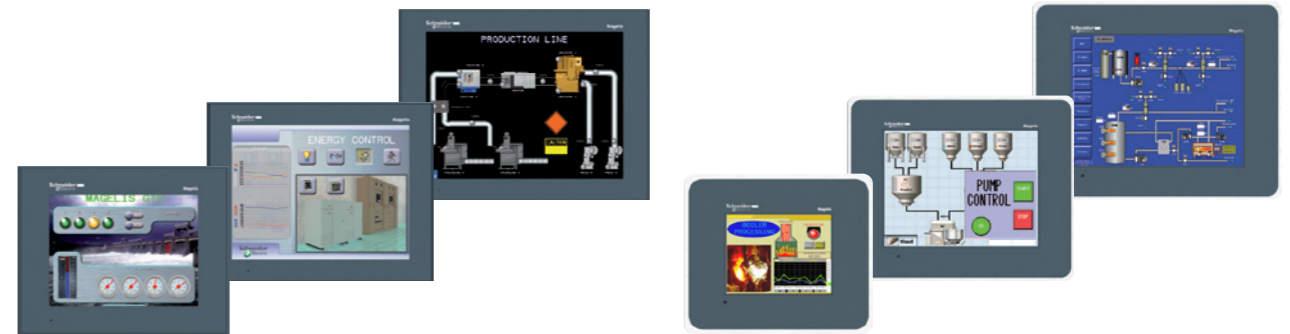

640 x 480 pixels, VGA backlit	640 x 480 pixels, VGA backlit	800 x 600 pixels, SVGA backlit	320 x 240 pixels, QVGA backlit	640 x 480 pixels, VGA backlit	800 x 600 pixels, SVGA backlit
7.5" color TFT LCD	10.4" color TFT LCD	12.1" color TFT LCD	5.7" color TFT LCD	10.4" color TFT LCD	12.1" color TFT LCD
Via touch screen					
–					
–					
–					
–					
96 MB Flash EPROM					
By 4 GB SD card					
Limited by capacity of internal Flash EPROM memory or of SD card					
Unlimited (8000 variables max.)					
Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED					
32 groups of 64 recipes comprising 1024 ingredients max.					
Yes, with log					
Yes					
Built-in					
–					
–					
IP 65 (IP 67 with addition of a cover)			IP 66K (Front panel with stainless steel frame) for food & beverage environment		
RS-232C (COM1) and RS-485 (COM2)					
Uni-TE (2), Modbus, Modbus TCP/IP (1) and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens					
RS-232C (COM1) and RS-485 (COM2)					
1 type A host connector + 1 type mini-B connector					
Ethernet TCP/IP (10BASE-T/100BASE-TX), Modbus Plus and Fipway via USB gateway					
RS-232C (COM1) serial link and USB port for parallel printer					
Vijeo Designer (on Windows XP and Windows 7)					
Magelis (333 MHz RISC CPU)					
HMIGTO4310	HMIGTO5310	HMIGTO6310	HMIGTO2315	HMIGTO5315	HMIGTO6315
Please refer to Magelis GTO Advanced panels catalog on our website www.schneider-electric.com .					

Please refer to Magelis GTO Advanced panels catalog on our website www.schneider-electric.com.

Human Machine Interface

Universal panels

Magelis GTU

Applications	Display of text messages, graphic objects, and synoptic views Control and configuration of data
Type of display module	Advanced display



Screen	Definition	800 x 480 pixels, 262 K colors	1,280 x 800 pixels, 262 K colors	1,280 x 800 pixels, 262 K colors
	Type	7" color TFT	10" color TFT	12" color TFT
Data entry	Touch pad	Single-touch resistive	Single-touch resistive	Single-touch resistive
Functions	Brightness sensor	-	-	-
	Front USB ports	-	-	-
	Wireless Ethernet	-	-	-
Ambient temperature		0...60 °C		
Supply voltage		12...24 V ---		
Dimensions	External W×H×D mm/in.	204 × 149 × 67/ 8.03 × 5.86 × 2.64	269 × 199 × 67/ 10.59 × 7.83 × 2.64	309 × 231 × 67/ 12.17 × 9.09 × 2.64
	Cut-out W×H mm/in.	190 × 135/7.48 × 5.31	255 × 185/10.03 × 7.28	295 × 217/11.61 × 8.54
Standards and certifications		CE, RCM, cULus Industrial Control Equipment (UL 508 and CSA C22.2 No. 142), cULus Hazardous Locations ANSI/ISA 12.12.01 and CSA C22.2 No. 213 Class I, IECEx/ATEX (1) Zone 2/22, EAC, KC		
Marine certifications		BV, CCS (3), DNV, GL, LR, RINA (3), ABS		
Compatible box models		Premium and Open box models		
Display module reference		HMIDT351	HMIDT551	HMIDT651
Pages		Please refer to Magelis GTU catalog on our website www.schneider-electric.com .		
Type of box module		Premium box		



CPU		RISC, 600 MHz
Operating system		Real Time Magelis on 1 GB SD storage
Pre-installed software		Vijeo Designer RT
Memory	RAM/SRAM (backup)	256 MB/512 KB
	Storage units	x2 SD card
Functions	Real-time clock	Yes, built-in
	Graphic	Alphanumeric, bitmap, bargraph, gauge, tank, indicator, curve, polygon, button, lamp
	Data	Alarm with log, trend with log, recipe, script
	Variables max.	8,000
Protocols		Uni-TE, Modbus, Modbus TCP/IP, and PLC brands Siemens, Omron, Mitsubishi, Allen-Bradley (Rockwell Automation), ABB
Communication	Ethernet port	x2 RJ45 10BASE-T/100BASE-TX/1000BASE-T
	Serial line	RJ45 RS-485 (COM1) + SubD9 RS-232/RS-485/RS-422 (COM2)
	Fieldbus	Fipio/Fipway and Modbus Plus via USB Gateway
	USB	2 USB Type-A (2.0) + 1 USB Type-mini B (2.0)
Discrete I/O		Terminal block with 1 speaker + 1 alarm + 1 buzzer output
Multimedia I/O		-
Standards and certifications		CE, RCM, cULus Industrial Control Equipment (UL 508 and CSA C22.2 No. 142), cULus Hazardous Locations ANSI/ISA 12.12.01 and CSA C22.2 No. 213 Class I, IECEx/ATEX (1) Zone 2/22, EAC, KC
Marine certifications		BV, CCS (3), DNV, GL, LR, RINA (3), ABS
Display units supported		HMIDT351, HMIDT551, HMIDT651, HMIDT542, HMIDT642, HMIDT732
Compatible display models		Advanced and Smart display models
Box module reference		HMIG3U
Pages		Please refer to Magelis GTU catalog on our website www.schneider-electric.com .

(1) Intelligent Data Service (IDS) of Vijeo Designer is an add-on option.
Note: All combinations of display and box modules are possible except for HMIDT643.

Applications	Display of text messages, graphic objects, and synoptic views Control and configuration of data
Type of display module	Smart display



Screen	Definition	800 x 600 pixels, 16 M colors	1,024 x 768 pixels, 16 M colors	1,024 x 768 pixels, 16 M colors
	Type	10.4" color TFT	12.1" color TFT	15" color TFT
Data entry	Touch pad	Multi-touch resistive	Multi-touch resistive	Multi-touch resistive
Functions	Brightness sensor	Yes	Yes	Yes
	Front USB ports	1 host + 1 device	1 host + 1 device	1 host + 1 device
	Wireless Ethernet	-	Yes (up to 30 m/98 ft)	-
Ambient temperature		0...60 °C		
Supply voltage		12...24 V ---		
Dimensions	External W×H×D mm/in.	273 × 215 × 67/ 10.74 × 8.46 × 2.64	315 × 241 × 67/ 12.40 × 9.50 × 2.64	397 × 296 × 67/ 15.63 × 11.65 × 2.64
	Cut-out W×H mm/in.	259 × 201/10.20 × 7.91	302 × 228/11.90 × 8.98	384 × 283/15.11 × 11.14
Standards and certifications		CE, RCM, cULus Industrial Control Equipment (UL 508 and CSA C22.2 No. 142), cULus Hazardous Locations ANSI/ISA 12.12.01 and CSA C22.2 No. 213 Class I, IECEx/ATEX (1) Zone 2/22, EAC, KC		
Marine certifications		BV, CCS (3), DNV, GL, LR, RINA (3), ABS		
Compatible box models		Premium and Open box models	Open box model	Premium and Open box models
Display module reference		HMIDT542	HMIDT642	HMIDT643 (2)
				HMIDT732
Pages		Please refer to Magelis GTU catalog on our website www.schneider-electric.com .		
Type of box module		Open box		



CPU		x86, 1.3 GHz
Operating system		Windows 7 Embedded on 16 GB CFast storage
Pre-installed software		Vijeo Designer RT, Office & PDF Readers, CAD Viewer, Internet browser, .Net 4.0, VNC Client/Server, Vijeo Citect web client (1)
Memory	RAM/SRAM (backup)	2 GB/512 KB
	Storage units	SD card and x2 CFast
Functions	Real-time clock	Yes, built-in
	Graphic	Alphanumeric, bitmap, bargraph, gauge, tank, indicator, curve, polygon, button, lamp
	Data	Alarm with log, trend with log, recipe, script
	Variables max.	12,000
Protocols		Uni-TE, Modbus, Modbus TCP/IP and PLC brands Siemens, Omron, Mitsubishi, Allen-Bradley (Rockwell Automation), ABB
Communication	Ethernet port	x2 RJ45 10BASE-T/100BASE-TX/1000BASE-T
	Serial line	RJ45 RS-485 (COM1) + SubD9 RS-232/RS-485/RS-422 (COM2)
	Fieldbus	Modbus Plus via USB Gateway
	USB	3 USB Type-A (2.0) + 1 USB Type-mini B (2.0)
Discrete I/O		Terminal block with 1 speaker + 1 alarm + 1 buzzer output
Multimedia I/O		1 Microphone input + 1 DVI output
Standards and certifications		CE, RCM, cULus Industrial Control Equipment (UL 508 and CSA C22.2 No. 142), cULus Hazardous Locations ANSI/ISA 12.12.01 and CSA C22.2 No. 213 Class I, IECEx/ATEX (1) Zone 2/22, EAC, KC
Marine certifications		BV, CCS (3), DNV, GL, LR, RINA (3), ABS
Display units supported		HMIDT351, HMIDT551, HMIDT651, HMIDT542, HMIDT642, HMIDT643, HMIDT732
Compatible display models		Advanced and Smart display models
Box module reference		HMIG5U
Pages		Please refer to Magelis GTU catalog on our website www.schneider-electric.com .


(2) HMIDT643 is compatible with only box HMIG5U and requires Vijeo Designer version V6.2 SP3 or later.
(3) Certifications will be available in 4th quarter, 2016.

Human Machine Interface

Advanced Keypad-Touchscreen panels

Magelis GK

Applications	Display of text messages, graphic objects and synoptic views Control and configuration of data	
Type of terminal	Keypad-Touchscreen panels	
		
Screen	Type	Color TFT LCD
	Size	5.7"
	Resolution	QVGA, 320 x 240 pixels, 65 K colors
	Backlight	Life span > 50,000 hrs @ 25 °C/77 °F
Data entry	Via keypad and/or touchscreen (configurable) and/or industrial pointer	
	Static function keys	10
	Dynamic function keys	14
	Service keys	8
	Alphanumeric keys	12
Memory capacity	Application	128 MB Flash EPROM
	Expansion	4 GB SD Card
Functions	Maximum number of pages	Limited by capacity of internal Flash EPROM memory or SD card memory
	Variables per page	Unlimited (8000 variables max.)
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.
	Curves	Yes, with log
	Alarm logs	Yes
	Real-time clock	Built-in
	Discrete I/O	-
	Multimedia I/O	-
Communication	Downloadable protocols	Uni-TE, Modbus, Modbus TCP/IP and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens
	Asynchronous serial link	RS-232C (COM1) RS-485 (COM2)
	USB ports	2
	Bus and networks	Modbus Plus, Fipway with USB gateway Ethernet TCP/IP (10BASE-T/100BASE-TX)
	Printer link	RS-232C (COM1) serial link, USB port for parallel printer
	Development software	Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)
Operating system	Magelis (CPU 333 MHz RISC)	
Type of terminal	HMIGK2310	
Page	Please refer to Magelis GK Advanced Keypad-Touchscreen panels catalog on our website www.schneider-electric.com .	

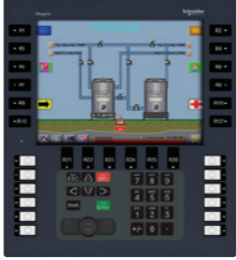Applications	Display of text messages, graphic objects and synoptic views Control and configuration of data	
Type of terminal	Keypad-Touchscreen panels	
		
Screen	Type	Color TFT LCD
	Size	10.4"
	Resolution	VGA, 640 x 480 pixels, 65 K colors
	Backlight	Life span > 50,000 hrs @ 25 °C/77 °F
Data entry	Via keypad and/or touchscreen (configurable) and/or industrial pointer	
	Static function keys	12
	Dynamic function keys	18
	Service keys	8
	Alphanumeric keys	12
Memory capacity	Application	128 MB Flash EPROM
	Expansion	4 GB SD Card
Functions	Maximum number of pages	Limited by capacity of internal Flash EPROM memory or SD card memory
	Variables per page	Unlimited (8000 variables max.)
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, LED
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.
	Curves	Yes, with log
	Alarm logs	Yes
	Real-time clock	Built-in
	Discrete I/O	-
	Multimedia I/O	-
Communication	Downloadable protocols	Uni-TE, Modbus, Modbus TCP/IP and for PLC brands: Mitsubishi, Omron, Allen-Bradley and Siemens
	Asynchronous serial link	RS-232C (COM1) RS-485 (COM2)
	USB ports	2
	Bus and networks	Modbus Plus, Fipway with USB gateway Ethernet TCP/IP (10BASE-T/100BASE-TX)
	Printer link	RS-232C (COM1) serial link, USB port for parallel printer
	Development software	Vijeo Designer (on Windows XP Professional and Windows 7 Professional 32/64-bit)
Operating system	Magelis (CPU 333 MHz RISC)	
Type of terminal	HMIGK5310	
Page	Please refer to Magelis GK Advanced Keypad-Touchscreen panels catalog on our website www.schneider-electric.com .	


Human Machine Interface

Industrial PC and display

Magelis HMIP Panel PCs

Type of Magelis iPC	Magelis HMIPS S-Panel PC	
	HMIPSO Optimized	HMIPSP Performance
		
Fanless	★★★★★	
Mounting type	Panel PC	
Display	<input type="checkbox"/> W10" multi-touch projected capacitive technology screen <input type="checkbox"/> W15" multi-touch projected capacitive technology screen <input type="checkbox"/> W19" multi-touch projected capacitive technology screen	
Definition	HD WSVGA, 1280 × 800 pixels	HD WFXGA, 1366 × 768 pixels
Front protection	IP 66 front panel, NEMA 4X indoor, and 7H hardness anti-scratch	
CPU	Intel® Atom E3827 dual-core (1.75 GHz) Intel Core™ i3-4010U dual-core 4 th generation (1.7 GHz)	
Expansion slots	1 optional full-size mini PCIe slot with optional interface slot (1)	1 full-size mini PCIe slot with optional interface slot
Storage	CFast card ≥ 16 GB, or SSD flash disk ≥ 80 GB with 2 million hours MTBF (1), or HDD hard disk ≥ 500 GB Enterprise 24/7 (1)	
RAM	4 GB (not extendable)	8 GB (not extendable)
Hot-swap RAID HDD and battery backup	-	
Operating system	None, or WES 7 Premium SP1 (64-bit), or Windows® 7 Ultimate SP1 (64-bit Multi-language) (2), or Win 8.1 Industry (64-bit Multi-language) (3)	
Supply voltage	24 V \pm (± 20%). AC power supply with external AC/DC power adapter HMIYPSOMAC1.	
Standards and certifications	<input type="checkbox"/> CE <input type="checkbox"/> cULus (UL IT 60950, CSA IT 60950) <input type="checkbox"/> RCM <input type="checkbox"/> EAC <input type="checkbox"/> CCC <input type="checkbox"/> FCC (part 15 EMC Class A)	<input type="checkbox"/> CE <input type="checkbox"/> cULus (UL IT 60950, CSA IT 60950) <input type="checkbox"/> RCM <input type="checkbox"/> EAC <input type="checkbox"/> CCC <input type="checkbox"/> FCC (part 15 EMC Class A)
Software	<input type="checkbox"/> Vijeo XD RT Demo to be installed and activated by unlimited license HMIRTMZLSPAZZ. <input type="checkbox"/> Vijeo XL with Configured-To-Order Magelis iPC <input type="checkbox"/> Vijeo Citect DVD is only for installation (depending on the model). Software activation license to be ordered separately.	
References	HMIPSO●552D1●01 HMIPSO●752D1●01	HMIPSP●752D1●01 HMIPSP●952D1●01
Pages	Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	
Configured-To-Order	Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	

(1) With HMIYPADPSOSTO1 expansion kit for HMIPSO allowing 1 HDD/SSD slot and 1 mini PCIe slot.
 (2) Available with HMIPSO and HMIPEP Configured-To-Order offer only.


Magelis HMIPEP Enclosed Panel PC	Magelis HMIP Panel PC 12"	
HMIPEP Performance	HMIPU Universal	HMIPP Performance
		
★★★★★	★★★★★	★★★★★
Enclosed PC	Panel PC	
<input type="checkbox"/> W19" multi-touch projected capacitive technology screen	<input type="checkbox"/> 12" single-touch resistive	
HD WFXGA, 1366 × 768 pixels	XGA, 1024 × 768 pixels	
IP 66 on all 6 faces, NEMA 4X indoor, and 7H hardness anti-scratch	IP 65 and Nema 4X indoor front panel protection when mounted on panel or enclosure door	
Intel Core i3-4010U dual-core 4 th generation (1.7 GHz)	Intel Core 827E (1.4 GHz)	Intel Core i3-3217UE dual-core (1.6 GHz)
1 full-size mini PCIe slot	2 optional PCI/PCIe slots with expansion module HMIPCI●61	
SSD flash disk ≥ 80 GB with 2 million hours MTBF	CFast card ≥ 4 GB (SLC technology) or SSD flash disk ≥ 60 GB with 2 million hours MTBF	HDD hard disk ≥ 500 GB Enterprise 24/7
8 GB (not extendable)	2 GB (user extendable)	4 GB (user extendable)
-	Optional battery backup	Optional hot-swap RAID HDD and battery backup
None, or WES 7 Premium SP1 (64-bit), or Windows 7 Ultimate SP1 (64-bit Multi-language) (2), or Win 8.1 Industry (64-bit Multi-language) (3)	Windows Embedded Standard 2009 or Windows 7 Ultimate 64-bit Professional	Windows® 7 Ultimate (64-bit Multi-language)
24 V \pm (± 20%). AC power supply with external AC/DC power adapter HMIYPSMAC1.	24 V \pm or 100...240 V \sim	
<input type="checkbox"/> CE <input type="checkbox"/> cULus (UL IT 60950, CSA IT 60950) <input type="checkbox"/> RCM <input type="checkbox"/> EAC <input type="checkbox"/> CCC <input type="checkbox"/> FCC (part 15 EMC Class A)	<input type="checkbox"/> CE <input type="checkbox"/> cULus (UL 508, CSA 22.2 No.142) <input type="checkbox"/> cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 No. 213) <input type="checkbox"/> C-Tick <input type="checkbox"/> GOST	
<input type="checkbox"/> Vijeo XD RT Demo to be installed and activated by unlimited license HMIRTMZLSPAZZ. <input type="checkbox"/> Vijeo XL with Configured-To-Order Magelis iPC <input type="checkbox"/> Vijeo Citect DVD is only for installation (depending on the model). Software activation license to be ordered separately.	<input type="checkbox"/> Vijeo Designer RT Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC). <input type="checkbox"/> Vijeo XD RT Demo to be installed and activated by unlimited license HMIRTMZLSPAZZ.	
HMIPEP●952D1●01	HMIPUC6●●●●●	HMIPUH6●●●●●
	HMIPUF6●●●●●	HMIPPF6●●●●●
		HMIPPH6●●●●●
Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .		
Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .		


(3) Win 8.1 requires user activation.

Human Machine Interface


Industrial PC and display


Magelis HMIBM Modular Box PCs and Modular HMIDM Displays

Type of Magelis iPC		Magelis HMIBM Modular Box PC HMIBMU Universal	
			
Fanless		★★★★ (1)	
Box PC or Panel PC mounting		Box PC: HMIBM Box wall/book mounting or Panel PC: HMIBM Box + associated HMIDM Display	
CPU (1)	Processor	Intel Celeron® 2980U dual-core (1.6 GHz)	
	Expansion slots	2 full-size mini PCIe with 2 optional interface slots	
	Storage	None, or CFast card ≥ 16 GB, or SSD flash disk ≥ 80 GB with 2 million hours MTBF, or HDD hard disk ≥ 500 GB Enterprise 24/7	None or Configured-To-Order offer
	RAM	4 GB (not extendable)	8 GB (not extendable)
Hot-swap RAID HDD and battery backup		Optional	
Operating system		None, or WES 7 Premium SP1 (64-bit), or Windows 7 Ultimate SP1 (64-bit Multi-language) (2), or Win 8.1 Industry (64-bit Multi-language) (3)	None or Configured-To-Order offer
Conformal coating		–	Yes
Supply voltage		18...36 V $\overline{\text{---}}$ or 100...240 V \sim with modular power adapter HMIYMMAC1	
Standards and certifications		<input type="checkbox"/> CE <input type="checkbox"/> RCM <input type="checkbox"/> EAC <input type="checkbox"/> CCC	<input type="checkbox"/> cULus Industrial Control (UL 61010, CSA 22.2 No.142) <input type="checkbox"/> cULus Hazardous locations (ANSI/ISA 12.12.01 and CSA C22.2 No. 213, Class I, Division 2) <input type="checkbox"/> CE ATEX and IECEx Hazardous Locations 3GD Zone 2/22
Software	Vijeo Designer and Vijeo XD RT Demo	<input type="checkbox"/> Vijeo XD RT Demo to be installed and activated by unlimited license HMIRTM CZLSPAZZ <input type="checkbox"/> Vijeo XL with Configured-To-Order Magelis iPC <input type="checkbox"/> Vijeo Citect DVD, depending on the model (4)	None or Configured-To-Order offer
References		HMIBMU•I29D••01	HMIBMU0I29D•00A
Pages		Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	
Configured-To-Order		Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	

Modular displays for Panel PC mounting		Magelis HMIDM Modular Display	
			
Display	Type	4:3 15" single-touch resistive	W15" multi-touch capacitive
	Definition	XGA, 1024 × 768 pixels	WHD FWXGA, 1366 × 768 pixels
	Front protection	IP 66, NEMA 4X indoor, and 7H hardness anti-scratch	
	Front USB port	1 USB 2.0 port	None
Standards and certifications		<input type="checkbox"/> CE <input type="checkbox"/> Marine DNV <input type="checkbox"/> RCM <input type="checkbox"/> EAC <input type="checkbox"/> CCC	<input type="checkbox"/> cULus Industrial Control (UL 61010, CSA 22.2 No.142) <input type="checkbox"/> cULus Hazardous Locations (ANSI/ISA 12.12.01 and CSA C22.2 No. 213, Class I, Division 2) <input type="checkbox"/> CE ATEX and IECEx Hazardous Locations 3GD Zone 2/22 <input type="checkbox"/> FCC (part 15 EMC Class A)
Panel PC mounting		All HMIBM Modular Box PCs are mounted behind the display	
References		HMIDM7421	HMIDM7521
Pages		Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	

(1) HMIYBFKT4BM11 fan kit is required only when PCI/PCIe expansions cards above 3 W are installed.
 (2) Available with Configured-To-Order offer only.


Magelis HMIBM Modular Box PC HMIBMP Performance	
	
★★★★ (1)	
Box PC: HMIBM Box wall/book mounting or Panel PC: HMIBM Box + associated HMIDM Display	
Intel Core i7-4650U 4th generation (1.7 GHz)	
2 full-size mini PCIe with 2 optional interface slots	
None or 2 PCI/PCIe	
None, or SSD flash disk ≥ 80 GB with 2 million hours MTBF, or HDD hard disk ≥ 500 GB Enterprise 24/7	None or Configured-To-Order offer
8 GB (not extendable)	16 GB (not extendable)
Optional	
None, or WES 7 Premium SP1 (64-bit) (2), or Windows 7 Ultimate SP1 (64-bit Multi-language) (2), or Win 8.1 Industry (64-bit Multi-language) (3)	None or Configured-To-Order offer
–	Yes
18...36 V $\overline{\text{---}}$ or 100...240 V \sim with modular power adapter HMIYMMAC1	
<input type="checkbox"/> CE <input type="checkbox"/> cULus Industrial Control (UL 61010, CSA 22.2 No.142) <input type="checkbox"/> cULus Hazardous Locations (ANSI/ISA 12.12.01 and CSA C22.2 No. 213, Class I, Division 2) <input type="checkbox"/> CE ATEX and IECEx Hazardous Locations 3GD Zone 2/22	<input type="checkbox"/> Marine DNV (without HDD) <input type="checkbox"/> RCM <input type="checkbox"/> EAC <input type="checkbox"/> CCC
<input type="checkbox"/> Vijeo XD RT Demo to be installed and activated by unlimited license HMIRTM CZLSPAZZ <input type="checkbox"/> Vijeo XL with Configured-To-Order Magelis iPC <input type="checkbox"/> Vijeo Citect DVD, depending on the model (4)	None or Configured-To-Order offer
HMIBMP•I74D••01	HMIBMP0I74D•00A
Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	
Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	


Magelis HMIDM Modular Display	
	
W19" multi-touch capacitive	W22" multi-touch capacitive
WHD FWXGA, 1366 × 768 pixels	Full HD, 1920 × 1080 pixels
IP 66, NEMA 4X indoor, and 7H hardness anti-scratch	
None	
<input type="checkbox"/> CE <input type="checkbox"/> CCC <input type="checkbox"/> EAC	<input type="checkbox"/> RCM <input type="checkbox"/> cULus (UL IT 60950, CSA IT 60950) <input type="checkbox"/> FCC (part 15 EMC Class A)
All HMIBM Modular Box PCs are mounted behind the display	
HMIDM9521	HMIDMA521
Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	

(3) Win 8.1 requires user activation.
 (4) Vijeo Citect DVD is only used for installation. Software activation license has to be ordered separately.


Human Machine Interface


Industrial PC and display
Magelis HMIBS S-Box and HMIR Rack PCs,
Magelis HMIDID iDisplay

Type of Magelis iPC		Magelis HMIBS S-Box PC	
		HMIBSO Optimized	HMIBSU Universal
			
Fanless		★★★★	★★★★★
CPU (1)	Processor	Intel Atom N270 (1.6 GHz)	Intel Atom N2600 (1.6 GHz)
	PCI slot	1 half-size mini PCIe	1 full-size mini PCIe
	Storage	CFast card	CFast card SSD with 5-year Intel warranty and 2 million hours MTBF
	RAM	2 GB	4 GB
Operating system		Windows Embedded Standard 2009	Windows 7 32-bit (WES 7 Premium)
Supply voltage		9...36 V ~	12...24 V ~
Standards and certifications		<input type="checkbox"/> CE <input type="checkbox"/> cULus	<input type="checkbox"/> EAC <input type="checkbox"/> CCC <input type="checkbox"/> RCM
Software	Vijeo Designer and Vijeo XD RT Demo	<input type="checkbox"/> Vijeo Designer RT Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) (1). <input type="checkbox"/> Vijeo XD RT Demo to be installed and activated by unlimited license HMIRTMZLSPAZZ	
	Bundle (validated and supported)	-	
Compatible display models		Compatible with all screens of Magelis iDisplay range	
References		HMIBSOCND1E01	HMIBSUCND1W01 HMIBSUSND1W01 HMIBSU0ND1001
Pages		Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	

Type of Magelis iPC		Magelis HMIDID iDisplay - remote monitors with DVI port	
			
Display	Type	12" color multi-touch resistive	
	Definition	XGA, 1024 × 768 pixels	
	Front protection	IP 65	
	Front USB port	1 USB 2.0 port	
Supply voltage		12...24 V ~	
Standards and certifications		<input type="checkbox"/> CE <input type="checkbox"/> cULus <input type="checkbox"/> EAC	<input type="checkbox"/> RCM <input type="checkbox"/> KC <input type="checkbox"/> ATEX/IECEX
Marine certifications		<input type="checkbox"/> BV <input type="checkbox"/> CCS (3) <input type="checkbox"/> DNV	<input type="checkbox"/> GL <input type="checkbox"/> LR <input type="checkbox"/> RINA (3) <input type="checkbox"/> ABS
Compatibility		All PCs with video port	
Reference		HMIDID64DTD1	
Page		Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	

(1) Require Vijeo Designer V6.2 SP2 or later to build and download HMI application.
(2) Rack 2U or 4U is a unit used to measure the height of a device that will be mounted in an 19" rack enclosure. 1 unit = 44.45 mm/1.75 in. high.

Magelis HMIR Rack PC			
HMIR•O Optimized PC 2U (2)	HMIRSU Universal PC 2U (2)	HMIRSP Performance PC 4U (2)	
			
-			
Intel Core G540 (2.5 GHz)	Intel Core G850 (2.9 GHz)	Intel Core i3-2120 (3.3 GHz)	Intel Xeon™ Quad core E3-1225 (3.1 GHz)
2 PCIe (x8) + 1 PCI		2 PCIe (x16) + 1 PCI	
No storage drive or 1 HDD		1 HDD	1 HDD, 2 HDD RAID, or 1 SSD
2 GB DDR3		4 GB DDR3	
None or Windows 7	Windows 7	Windows 7	Windows 7, or Windows Server 2008 Standard R2, or Windows Server 2012 R2
110...240 V ~ (300 W single power supply)			110...240 V ~ (500 W single or redundant power supply)
<input type="checkbox"/> CE <input type="checkbox"/> cULus	<input type="checkbox"/> EAC <input type="checkbox"/> CCC	<input type="checkbox"/> RCM	
<input type="checkbox"/> Vijeo Designer RT Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) (1). <input type="checkbox"/> Vijeo XD RT Demo to be installed and activated by unlimited license HMIRTMZLSPAZZ			
-		None or Vijeo Citect DVD for SCADA applications	None or Vijeo Citect DVD, or PES leaflet
Compatible with all screens of Magelis iDisplay range			
HMIRXOHC3•01	HMIRSOHPA3W01	HMIRSU•3A3701	HMIRSP•X•6•••
Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .			

Type of Magelis iPC		Magelis HMIDID iDisplay - remote monitors with DVI port	
			
Display	Type	15" color multi-touch resistive	
	Definition	XGA, 1024 × 768 pixels	
	Front protection	IP 65	
	Front USB port	1 USB 2.0 port	
Supply voltage		12...24 V ~	
Standards and certifications		<input type="checkbox"/> CE <input type="checkbox"/> cULus <input type="checkbox"/> EAC	<input type="checkbox"/> RCM <input type="checkbox"/> KC <input type="checkbox"/> ATEX/IECEX
Marine certifications		<input type="checkbox"/> BV <input type="checkbox"/> CCS (3) <input type="checkbox"/> DNV	<input type="checkbox"/> GL <input type="checkbox"/> LR <input type="checkbox"/> RINA (3) <input type="checkbox"/> ABS
Compatibility		All PCs with video port	
Reference		HMIDID73DTD1	
Page		Please refer to Magelis Industrial PC and Display catalog on our website www.schneider-electric.com .	

(3) Certifications will be available in Q4, 2016.

Human Machine Interface

HMI controllers

Magelis SCU

Applications	Display of text messages, graphic objects and mimics, control and configuration of data	
Terminal type	IEC 1131-2 control function Small HMI controllers For control of simple machine	
		
Display	Definition	65K colors
	Type	3.5" color TFT LCD 5.7" color TFT LCD
Data entry	Via touch screen	
Memory capacity	Application	128 MB Flash EPROM
	Expansion	—
Functions	Maximum number of pages and maximum number of instructions	Limited by internal Flash EPROM memory capacity
	Variables per page	Unlimited (8000 variables max.)
	Programmed logic	5 languages according to IEC 1131-2 (LD, ST, FBD, SFC, IL)
	Counting/positioning	2 x 100 KHz high speed counter inputs/2 x 50 KHz pulse train outputs
	Control (PID)	Yes
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, light
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.
	Curves	Yes, with log
	Alarm logs	Yes
	Real-time clock	Built-in
I/O	Integrated	<input type="checkbox"/> 14 x 24 V \overline{DC} digital inputs <input type="checkbox"/> 2 high speed counter (HSC) inputs <input type="checkbox"/> 8 digital relay outputs <input type="checkbox"/> 2 pulse train source transistor outputs
	I/O modular expansion	—
Communication	Downloadable protocols	Modbus, Modbus TCP/IP (1)
	Asynchronous serial link	RS-232C/RS-485 (COM1)
	USB ports	1 Host type A + 1 Device type mini-B
	Buses and networks	1 CANopen master
	Printer link	Ethernet TCP/IP (10BASE-T/100 BASE-TX) USB port for parallel printer
Design software	SoMachine on Windows XP Professional and Windows 7 Professional 343647/64-bit (please refer to our website www.schneider-electric.com).	
Operating system	Magelis (333 MHz RISC CPU)	
Terminal type	HMISCU6A5	HMISCU8A5
Pages	Please refer to Magelis SCU catalog on our website www.schneider-electric.com .	


(1) Depending on model.

Applications	Display of text messages, graphic objects and mimics, control and configuration of data	
Terminal type	IEC 1131-2 control function Small HMI controllers For control of simple process	
		
Display	Definition	65K colors
	Type	3.5" color TFT LCD 5.7" color TFT LCD
Data entry	Via touch screen	
Memory capacity	Application	128 MB Flash EPROM
	Expansion	—
Functions	Maximum number of pages and maximum number of instructions	Limited by internal Flash EPROM memory capacity
	Variables per page	Unlimited (8000 variables max.)
	Programmed logic	5 languages according to IEC 1131-2 (LD, ST, FBD, SFC, IL)
	Counting/positioning	2 x 100 KHz high speed counter inputs/2 x 50 KHz pulse train outputs
	Control (PID)	Yes
	Representation of variables	Alphanumeric, bitmap, bargraph, gauge, tank, tank level indicator, curves, polygon, button, light
	Recipes	32 groups of 64 recipes comprising 1024 ingredients max.
	Curves	Yes, with log
	Alarm logs	Yes
	Real-time clock	Built-in
I/O	Integrated	<input type="checkbox"/> 6 x 24 V \overline{DC} digital inputs <input type="checkbox"/> 2 high speed counter (HSC) inputs <input type="checkbox"/> 6 digital relay outputs <input type="checkbox"/> 2 pulse train source transistor outputs <input type="checkbox"/> 2 x 13-bit analog inputs (Voltage/current) <input type="checkbox"/> 2 x 16-bit analogue temperature inputs (TC/PT100-1000) <input type="checkbox"/> 2 x 12-bit analog outputs (Voltage/current)
	I/O modular expansion	—
Communication	Downloadable protocols	Modbus, Modbus TCP/IP (1)
	Asynchronous serial link	RS-232C/RS-485 (COM1)
	USB ports	1 Host type A + 1 Device type mini-B
	Buses and networks	1 CANopen master
	Printer link	Ethernet TCP/IP (10BASE-T/100 BASE-TX) USB port for parallel printer
Design software	SoMachine on Windows XP Professional and Windows 7 Professional 343647/64-bit (please refer to our website www.schneider-electric.com).	
Operating system	Magelis (333 MHz RISC CPU)	
Terminal type	HMISCU6B5	HMISCU8B5
Pages	Please refer to Magelis SCU catalog on our website www.schneider-electric.com .	

Human Machine Interface

HMI configuration software for HMI terminals

Applications Traditional architecture, HMI executed on PC platform or dedicated terminal
Configuration software for operator dialogue applications

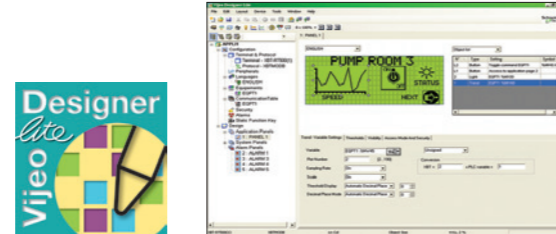

Compatible products	Type	Magelis™ XBTN/R/RT Small panels (1)
	Maximum number of targets	1
	Operating system on terminals	Proprietary Magelis
Functions	Reading/writing of PLC variables	Yes
	Display of variables	Yes
	Data processing	–
	Sharing of variables between HMI applications	–
	Saving of variables to external database	–
Internationalization		–
Development of graphic applications	Native library of graphic objects	Yes
	Curves and alarms	Yes (2)
	Scripts	–
Communication between HMI application and PLCs		Via I/O drivers: Schneider Electric or third party protocols (Mitsubishi, Omron, Rockwell Automation, Siemens)
Uploading of applications		Yes
Simulation of HMI applications		Yes
Recipe management		–
Report and barcode printing		–
Screen capture		–
Access security		Linked to user profiles
Interface languages		Screens, online help and documentation in electronic format available in 6 languages: English, French, German, Italian, Simplified Chinese and Spanish
OS compatibility		Windows XP Professional, Windows Vista Business (32-bit), Windows 2000 Professional
Software type		Vijeo Designer™ Lite
Pages		Please refer to Vijeo Designer catalog on our website www.schneider-electric.com .

(1) All Magelis XBT and Magelis GTO/GTU terminals behave transparently on restoration of power.
(2) Depending on compatible product.

Applications Traditional architecture, HMI executed on PC platform or dedicated terminal
Configuration software for operator dialogue applications



Compatible products	Type	Magelis™ STO/STU Small panels Magelis™ XBTGT/GK/GH/GTW/GTO Advanced panels and Magelis™ GTU Universal panels (1) Magelis™ industrial PCs	Magelis STO Color Magelis GTO Advanced panels and Magelis GTU Universal panels Magelis Industrial PCs
	Maximum number of targets	32	1
	Operating system on terminals	Proprietary for Magelis STO/STU, Magelis XBTGT/GK/GH and Magelis GTO/GTU Windows XP embedded for Magelis GTW	Proprietary for Magelis STO Color, Magelis GTO/GTU Windows Embedded Standard 7 for Magelis Industrial PCs
Functions	Reading/writing of PLC variables	Yes, up to 8000 internal and external variables	
	Display of variables	Yes	
	Data processing	Yes, using expression editor or Java programming	Yes, using convertor or action editor
	Sharing of variables between HMI applications	Up to 300 variables between 8 terminals, without router PLC Proprietary protocol above TCP/IP	–
	Saving of variables to external database	Yes, with the Intelligent Data Service extension	–
Internationalization		Up to 15 languages supported by 34 western alphabets, 4 Asian alphabets and 2 middle eastern alphabets embedded in the application	Up to 32 languages supported by 34 type of fonts embedded in the application
Development of graphic applications	Native library of graphic objects	Yes	
	Curves and alarms	Yes, with log	
	Scripts	Java	–
Communication between HMI application and PLCs		Via I/O drivers: Schneider Electric or third party protocols (Mitsubishi, Omron, Rockwell Automation, Siemens)	
Uploading of applications		Yes	–
Simulation of HMI applications		Yes	
Recipe management		Yes, up to 32 groups, 1024 ingredients for 256 recipes per group, proprietary or CSV format, complete multilingual support for labels and ingredients	
Report and barcode printing		On the fly alarms, log data. Up to 9999 active alarms, record or logs Main barcode types supported: UPC-A, UPC-E, JAN/EAN8, JAN/EAN13, ITF, CODE39, CODE93, CODE128, CODABAR (NW-7)	–
Screen capture		Yes, for Magelis XBTGT (XBTGT1105 and higher), Magelis GTO/GTU and Magelis industrial PCs. JPEG format	Yes, for Magelis GTU Open Box and Magelis industrial PCs. PNG format
Access security		Linked to user profiles	
Interface languages		Screens, online help and documentation in electronic format available in 8 languages: English, French, German, Italian, Brazilian Portuguese, Traditional Chinese, Simplified Chinese and Spanish	
OS compatibility		Windows XP Professional, Windows 7 Business (32-bit and 64-bit)	Windows 7, 8.1, 10 (32-bit and 64-bit)
Software type		Vijeo Designer™	Vijeo XD™
Pages		Please refer to Vijeo Designer catalog on our website www.schneider-electric.com .	Please refer to Vijeo XD catalog on our website www.schneider-electric.com .

USB accessories (programmable with Vijeo Designer)

Monolithic USB tower lights



Description	<ul style="list-style-type: none"> 3 multi-color LEDs clear lens 2-tone buzzer (up to 85 dB at 1 m/3.28 ft distance) pre-assembled USB cable for easy connection USB cable clamp to help ensure firm connection 	
Degree of protection	IP 54	
Dimensions	Ø 60 mm/2.36 in.	
Power consumption	2 W	
Product certifications	CE, UL, CSA, GOST, and RCM	
Type of mounting/cut-out	Mounting on support tube with fixing plate: 4x Ø 6 mm/0.24 in.	Direct mounting on horizontal support: 3x Ø 5 mm/0.20 in.
Connection	USB type A female: <ul style="list-style-type: none"> 300 mm/11.81 in. for tube mounting 400 mm/15.75 in. for direct mounting 	
Compatibility with Magelis	Magelis XBT GT/GC, HMI GK/GTO/GXO/SCU/G3U (1)	
Reference	XVGU3SWV	XVGU3SHAV
Pages	Please refer to USB accessories for HMI terminal catalog on our website www.schneider-electric.com .	

(1) Except GT1000 series of Magelis XBTGT

Illuminated USB switch

USB keyboard

Biometric USB switch



<ul style="list-style-type: none"> 5 customizable soft/static function keys multi-color LED backlight or alarm acknowledgment 	<ul style="list-style-type: none"> USB keyboard with 12 keys and integrated LEDs that can be used as user customizable function keys or alphanumeric input keys 	<ul style="list-style-type: none"> Manages access to HMI data via USB port Levels of authorization through fingerprint recognition Traceability of users and operations Database management from PC
IP 65		
80 x 97.6 x 31.5 mm/3.15 x 3.84 x 1.24 in. (H x W x D)	54 x 122 x 28 mm/2.13 x 4.80 x 0.08 in. (H x W x D)	54 x 69.3 x 38.8 mm/2.13 x 2.73 x 1.53 in. (H x W x D)
2 W or less	0.75 W or less	1.6 W max.
UL, CSA, CE and GOST	CSA, GOST-R, KCC, CE and UL	UL, CSA, GOST, and CE
Mounted on flat surface: M22	Mounted on flat surface: M22	Mounted on flat surface/vertical surface: M22
USB mini-B cable	USB type B cable	USB type A male with 1 m/3.28 ft cable
Magelis Panel PC/Box PC, Magelis XBT GT/GC, HMI GK/GTO/GXO/SCU/G3U/G5U (1)	HMI GTO/GXO/STO/STU/SCU/G3U	Magelis Panel PC/Box PC, Magelis XBT GT/GC, HMI GK/GTO/GXO/STU/SCU/G3U/G5U (1)
HMIZRA1	HMIZKB1	XB5S5B2L2
Please refer to USB accessories for HMI terminal catalog on our website www.schneider-electric.com .		

Human Machine Interface



Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.schneider-electric.com/hmi

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric